


SPECIFICATIONS

|                                          |                                                                                                                                                         |                         |
|------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| Satellite Signals Tracked Simultaneously |                                                                                                                                                         |                         |
| Signal tracking                          | 600 channels                                                                                                                                            |                         |
|                                          | BDS B1,B2,B3                                                                                                                                            |                         |
|                                          | GPS L1C/A,L1C,L2C,L2E,L2P,L5                                                                                                                            |                         |
|                                          | GLONASS L1C/A,L1P,L2C/A,L2P,L3                                                                                                                          |                         |
|                                          | QZSS L1C/A,L1 SAIF, L1C,L2C,L5,LEX                                                                                                                      |                         |
|                                          | SBAS L1C/A,L5                                                                                                                                           |                         |
|                                          | Galileo Glove-A and Glove-B, E1, E5A, E5B, E5AltBOC, E6                                                                                                 |                         |
| GNSS features                            | MSS L-Band: Preserved                                                                                                                                   |                         |
|                                          | Positioning output rate: 1Hz~50Hz                                                                                                                       |                         |
|                                          | Initialization time: <10s                                                                                                                               |                         |
|                                          | Initialization reliability: >99.99%                                                                                                                     |                         |
| Positioning precision                    |                                                                                                                                                         |                         |
| Code differential GNSS positioning       | Horizontal: ±0.25m+1ppm                                                                                                                                 | Vertical: ±0.50m+1ppm   |
| SBAS positioning                         | Typically<0.5m 3DRMS                                                                                                                                    |                         |
| High-Precision Static                    | Horizontal: ±3mm+0.1ppm                                                                                                                                 | Vertical: ±3.5mm+0.4ppm |
| Static and Fast Static                   | Horizontal: ±2.5mm+0.5ppm                                                                                                                               | Vertical: ±5mm+0.5ppm   |
| UHF RTK                                  | Horizontal: ±8mm+1ppm                                                                                                                                   | Vertical: ±15mm+1ppm    |
| Network RTK                              | Horizontal: ±8mm+0.5ppm                                                                                                                                 | Vertical: ±15mm+0.5ppm  |
| RTK initialization time                  | 2~8s                                                                                                                                                    |                         |
| User interaction                         |                                                                                                                                                         |                         |
| Operating System                         | Linux                                                                                                                                                   |                         |
| Buttons                                  | Double Button Operation                                                                                                                                 |                         |
| Indicators                               | Four Indicator Lights                                                                                                                                   |                         |
| Web UI                                   | Freely configure and monitor the receiver by accessing to the web server via Wi-Fi or USB                                                               |                         |
| Voice guide                              | iVoice intelligent voice technology provides status and voice guide                                                                                     |                         |
|                                          | Supporting Chinese, English, Korean, Russian, Portuguese, Spanish, Turkish and user defined language                                                    |                         |
| Secondary development                    | Providing secondary development kit                                                                                                                     |                         |
| Hardware performance                     |                                                                                                                                                         |                         |
| Dimension                                | 130mm(Diameter)x85.3mm(Height)                                                                                                                          |                         |
| Weight                                   | 820g                                                                                                                                                    |                         |
| Material                                 | Magnesium aluminum alloy shell                                                                                                                          |                         |
| Operating                                | -45°C~-70°C                                                                                                                                             |                         |
| Storage                                  | -55°C~+85°C                                                                                                                                             |                         |
| Humidity                                 | 100% Non-condensing                                                                                                                                     |                         |
| Waterproof                               | IP67 standard, protected from short time immersion to depth of 1m                                                                                       |                         |
| Dustproof                                | IP67 standard, fully protected against blowing dust                                                                                                     |                         |
| Shock and vibration                      | Withstand 2 meters pole drop onto the cement ground naturally                                                                                           |                         |
| Battery                                  | 6800mAh, Li-ion battery built in, 7.4V                                                                                                                  |                         |
| Battery life                             | 10-14hours (Supporting external battery)                                                                                                                |                         |
| External DC Power                        | 9-28V                                                                                                                                                   |                         |
| Communications                           |                                                                                                                                                         |                         |
| I/O port                                 | 5PIN LEMO external power port+RS232, 7PIN external USB(OTG)+Ethernet                                                                                    |                         |
|                                          | 1 radio antenna interface                                                                                                                               |                         |
| Wireless modem                           | Built-in radio 1/2/3W                                                                                                                                   |                         |
| Frequency Range                          | 410-470MHz                                                                                                                                              |                         |
| Communication Protocol                   | TrimTalk450s, TrimMark3, SOUTH (KOLIDA)                                                                                                                 |                         |
| Double Module Bluetooth                  | BLEBluetooth 4.0 standard, support for android, ios cellphone connection                                                                                |                         |
|                                          | Bluetooth 2.1+EDR standard , able to transmit and receive RTK correction data in Base-Rover mode.                                                       |                         |
| NFC Communication                        | Realizing close range (shorter than 10cm) automatic pair between receiver and controller (controller equipped NFC wireless communication module needed) |                         |
| External Devices                         | Optional external GPRS/EDGE dual-mode communication module, switchable; allow to connect external WLAN card                                             |                         |
| WIFI                                     |                                                                                                                                                         |                         |
| Standard                                 | 802.11 b/g standard                                                                                                                                     |                         |
| WIFI Hotspot                             | The WIFI hotspot allows smart mobile terminal to connect and access to the internal webserver to control and monitor receiver                           |                         |
| WIFI data link                           | To work as the datalink that receiver is able to broadcast and receive differential data via WIFI                                                       |                         |
| Data storage/ Transmission               |                                                                                                                                                         |                         |
| Data Storage                             | 8GB SSD internal storage                                                                                                                                |                         |
|                                          | Support external USB storage (up to 32 GB) and automatical cycle storage                                                                                |                         |
|                                          | Changeable record interval, up to 50Hz raw data collection                                                                                              |                         |
| Data Transmission                        | USB data transmission, supporting FTP/HTTP data download                                                                                                |                         |
| Data Format                              | Differential data format: CMR+, CMRx, RTCM 2.1, RTCM 2.3, RTCM 3.0, RTCM 3.1, RTCM 3.2                                                                  |                         |
|                                          | GPS output data format: NMEA 0183, PJK plane coordinates, Binary code, Trimble GSOF                                                                     |                         |
|                                          | Network model support: VRS, FKP, MAC, fully support NTRIP protocol                                                                                      |                         |
| Inertial sensing system                  |                                                                                                                                                         |                         |
| Electronic bubble                        | Controller software displays electronic bubble, user can check leveling status of the centering rod real time                                           |                         |
| Thermometer                              | Built-in thermomter sensors, features intelligent temperature control technology which can monitor and adjust the temperature of receiver in real time  |                         |



SuperRTK K3

600 Channels, Smallest Full Function RTK Ever  
Enhanced BEIDOU Signal Processing Ability  
14 Hours Continuous Working  
Web UI, Wifi, E-Bubble

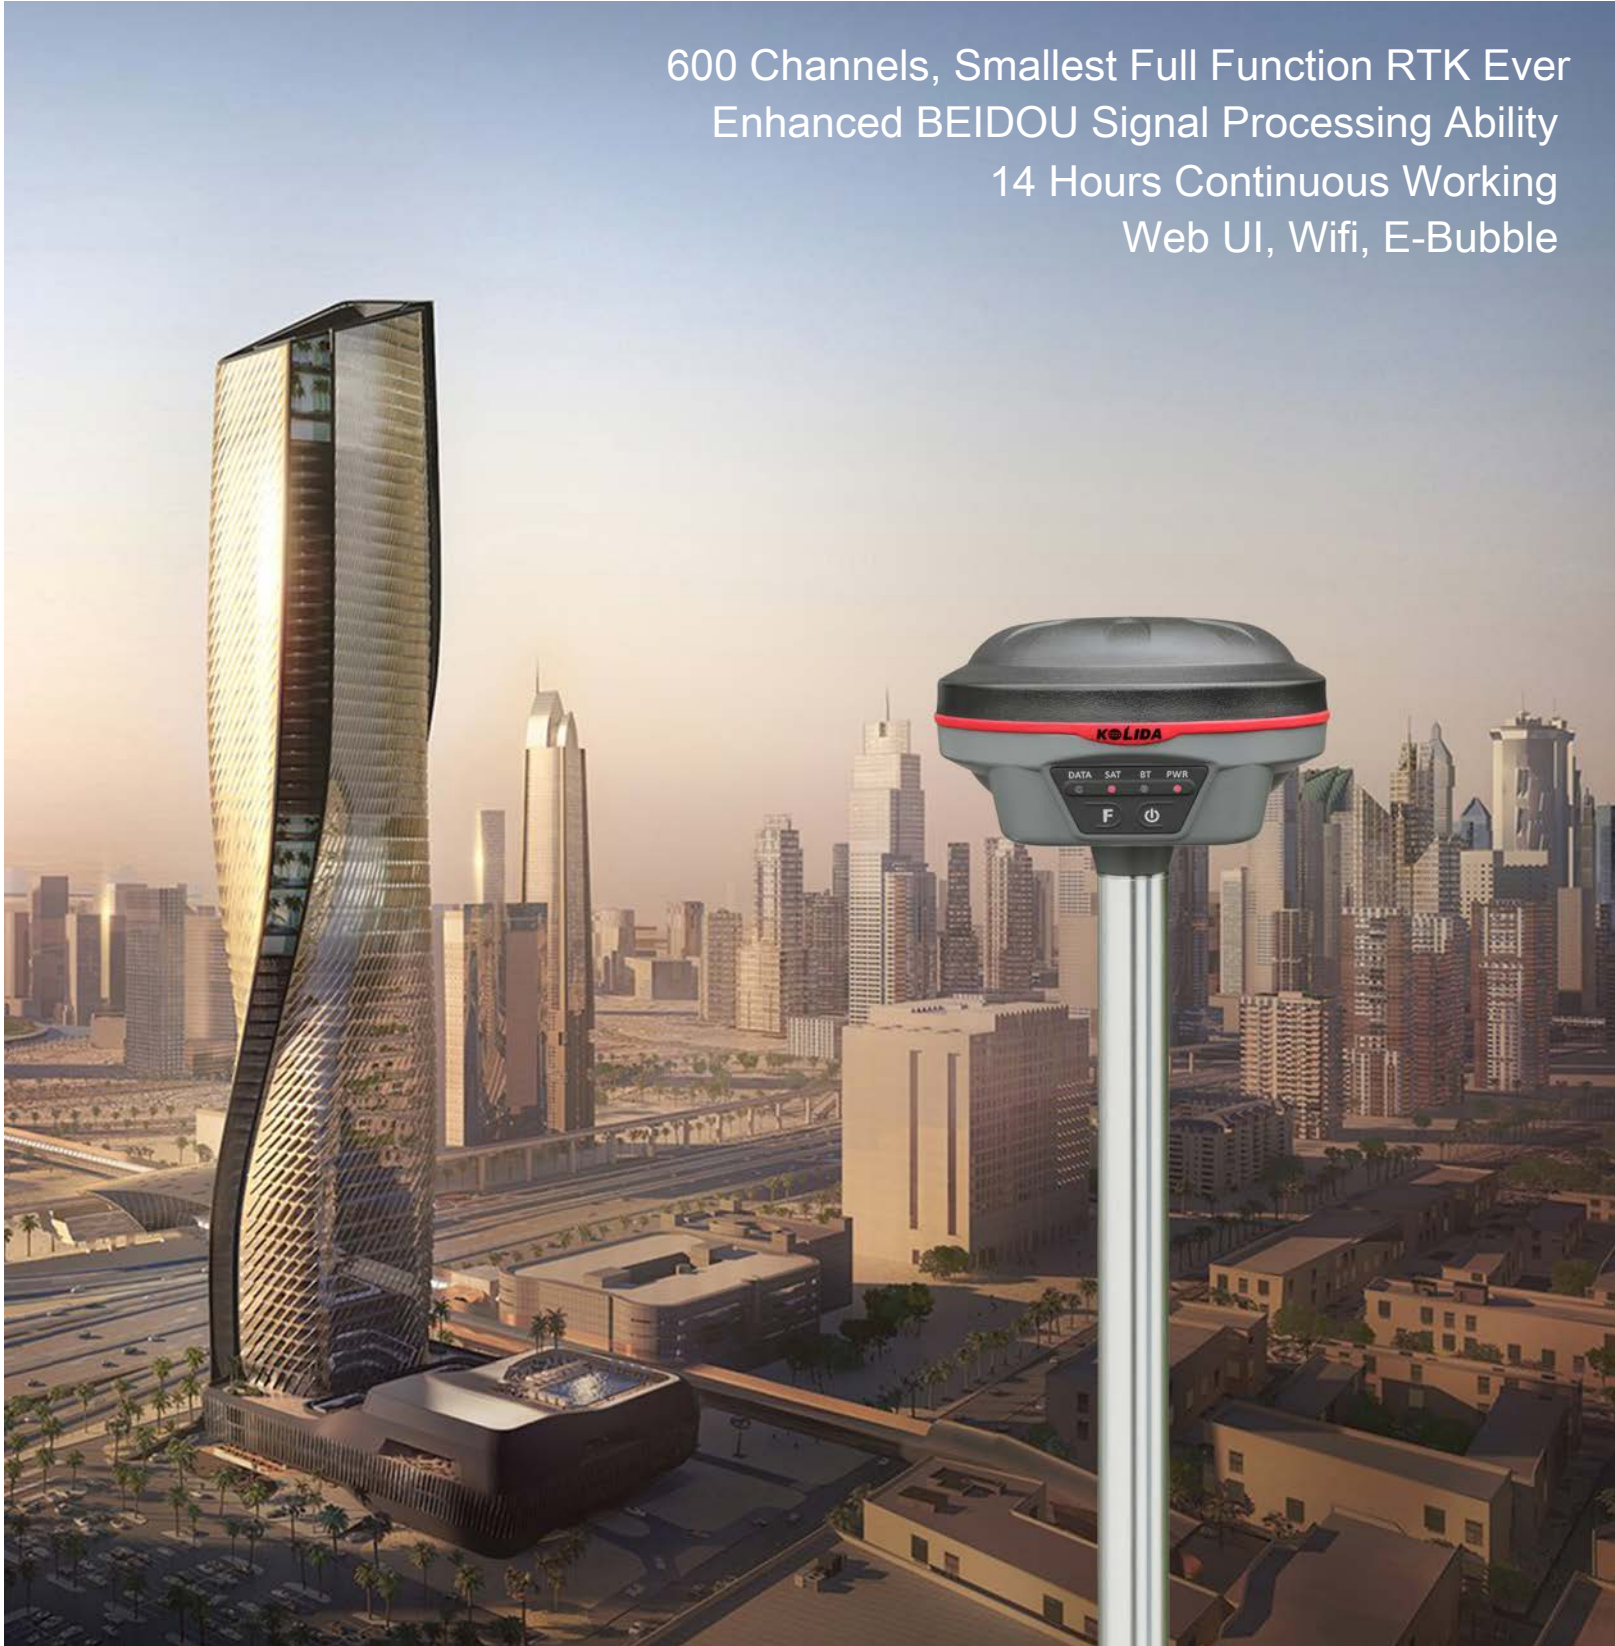

GUANGDONG KOLIDA INSTRUMENT CO., LTD.  
Add: 7/F, South Geo-information Industrial Park, No.39 Si Cheng Road, Tian He IBD, Guangzhou 510663, China  
Tel: +86-20-22139033      Fax: +86-20-22139032  
Email: export@kolidainstrument.com      market@kolidainstrument.com      http://www.kolidainstrument.com



# 600 Channels Full constellations


K3 is equipped with a Kolida K800 series GNSS board which has 600 channels and is capable to support multiple satellite constellations: GPS, GLONASS, BEIDOU and GALILEO, SBAS, including the latest Beidou-3 system.

(The receiver has the ability to get RTK FIXED solution by using individually any of the existed satellite systems and not necessarily primarily use GPS system.)



## Small As an Apple

The diameter of the K3 is only 13cm, height only 8.53cm, and the weight is only 820g. It is as small as an apple that you can even put it into your pocket.




# New Integration Technology New Level of Stability

GNSS antenna, Bluetooth, wifi module are integrated into one board, which helps to save the internal space of K3, making the signal better and performance more stable.

This design also can reduce multipath effect, help receiver to keep fixed solution under canopy and even work closely to buildings.



## The Smallest UHF Radio in the History

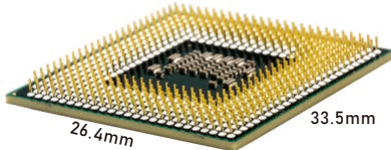

The latest micro UHF module has high sensitivity and low power consumption.

# Magnesium Aluminum Alloy Shell Is Shatter Resistant

K3 is able to withstand 2 meters pole drop onto the cement ground naturally and fully protected against blowing dust.



## Energized Battery Increased Working Time

4 hours quick charge is enough to enable K3 a 14 hours of using time.

## Other Features

|                   |                                 |                         |                   |
|-------------------|---------------------------------|-------------------------|-------------------|
| Linux OS          | Web UI                          | WIFI                    | Electronic Bubble |
| 410-470MHZ Radio  | 8G SSD Storage                  | OTG FIELD DATA DOWNLOAD | NFC               |
| Bluetooth 4.0+2.1 | Mobile Reference Station (WIFI) |                         |                   |

## New Case, More Portable



The light weighted case for K3 is stable and wear resistant.

## Data Collector. Simply Trustable



### T17N

- Windows Mobile 6.5
- 1Ghz CPU, RAM 512MB
- 1GB ROM, Extendable to 32GB
- 3.7V, 6500mAh removable Li-ion
- 3.7 Inch, 480X640VGA
- WCDMA
- Include EGSTAR3.0



### H3PLUS

- Android 6.0
- Quad-core 1.3GHz CPU, 2GB RAM
- 4.3 Inches, WVGA 800X480dpi
- 8 megapixel camera with auto focus
- 6500mAh, up to 10Hours
- Dual SIM Card
- 4G FDD TDD network, 3G WCDMA
- GPS\GLONASS\SBAS\A-GPS
- Include EGSTAR

## New app. New Productivity

### SurvX Android

Windows CE data controller is too old technology? No problem. Simply download SurvX App on your smart phone or tablet. Enjoy the smooth operation of Android platform !



#### Seamless Connection

- NFC
- Saving-Time Bluetooth Search
- Auto Connection

#### Intuitive interactive design

- Reducing mistakenly touching
- User define program menu
- Signal strength graphic display

#### Rich & Practical Programs

- CAD function & Line work
- 3D display mode
- Road & Power line program

#### Creativity

- Saving & Sharing coordinate system by QR code
- Data recovery & Encryption function
- Support Google map and other base map

## Post-processing SW. Free of Charge

### KOLIDA GEO Office

Integrates static data processing and kinematic data adjustment



#### Intelligent

- Antenna manager with popular receiver types.
- Fast processing and clear display
- Manually edit and filter satellite data for best result
- Update online.

#### Versatile

- Compatible with numerous data format.
- Export abundant types of report.
- Transformable to RINEX format