


L600

GNSS receiver



PRECISION
you can trust

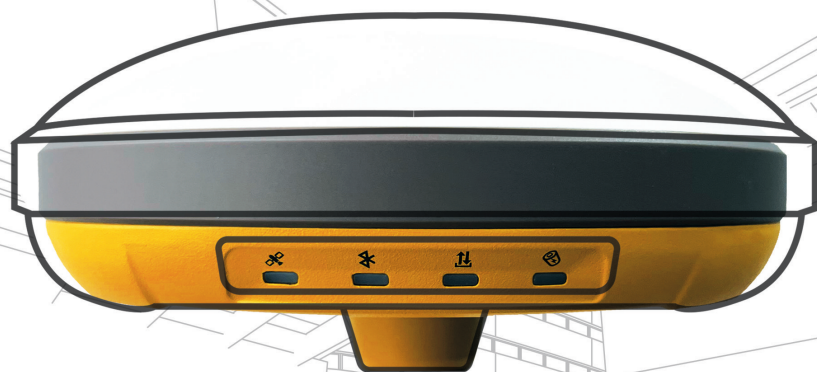


IMU TILT



UHF RADIO



WEBUI



FULL GNSS

α-GEO

Performance specification

Satellite signals tracked simultaneously	GPS: L1 C/A, L2C, L2P, L5
	GLONASS: L1C/A, L1P, L2 C/A, L2P
	BEIDOU: B1, B2, B3, B1C, B2a, B2b
	GALILEO: E1, E5a, E5b
	QZSS: L1, L2C, L5
	SBAS: WAAS, EGNOS, MSAS, GAGAN, SDGM
	IRNSS: L5
Channels	965 tracking Channels
Cold start	<60 s
Hot start	<15 s
Positioning output rate	1Hz - 20Hz
Signal Reacquisition	<1s
RTK Initialization time	<10s
Initialization Reliability	>99.99%
Time accuracy	20 ns

Positioning¹

Code differential GNSS positioning	Horizontal: 0.25 m + 1 ppm RMS
	Vertical: 0.50 m + 1 ppm RMS
	SBAS differential positioning accuracy ² : typically <5m 3DRMS

Static GNSS surveying	Horizontal: 2.5 mm + 0.5 ppm RMS
	Vertical: 5 mm + 0.5 ppm RMS

Real Time Kinematic Surveying

Single Baseline < 30 KM	Horizontal: 8 mm + 1 ppm RMS
	Vertical: 15 mm + 1ppm RMS
Network RTK ³	Horizontal: 8 mm + 0.5 ppm RMS
	Vertical: 15 mm + 0.5 ppm RMS

HARDWARE

PHYSICAL	
Material	Magnesium alloy
Dimensions	160mm * 52mm (without bottom connector 74mm)
weight	≤1.0 Kg
Operating temperature	-40°C to + 75°C
Storage temperature	-55°C to + 85°C
Protection IP	IP67 dust proof, protected from 30min immersion to depth of 1m
Shock	Survive a 2m pole drop onto concrete
Vibration	MIL-STD-810G
Humidity	100%, condensing

1- Precision and reliability may be subject to anomalies due to multipath, obstructions, satellite geometry, and atmospheric conditions. The specifications stated recommend the use of stable mounts in an open sky view, EMI and multipath clean environment, optimal GNSS constellation configurations. Base lines longer than 30 km require precise ephemeris and occupations up to 24 hours may be required to achieve the high precision static specification.

2- Depends on SBAS system performance

3- Network RTK PPM values are referenced to the closest physical base station and depends on network performances.

ELECTRYCAL

Power: 9~24 V DC external power input on 5 pin LEMO port
Support USB Type-C fast charging
Internal 6800mA lithium-ion battery

Battery Life	Rover Mode: 12 hours
	Base Mode: 7 hours
	Static Mode: 15 hours

Communication & Data Storage

I/O interface	
LEMO port (5pin)	Supports power input, serial port control, and external radio communication
USB Type-C port	Data download / Charging
Sim card slot	Supports Nano-SIM
Antenna port	UHF antenna interface

Radio modem (optional)

Transmit power	1/2 w switchable, Work range is longer than 4km
Frequency band	410MHz-470MHz; supports to set the frequency

Supports retransmitting correction from CORS; compatible with other brands

Cellular

Integrated full frequency multi band 4G modem, supports WCDMA/CDMA2000/TDD-LTE/FDD-LTE

WIFI

802.11 b/g standard, access point & client mode, supports access to hotspot for correction transmission

Bluetooth

Fully integrated Bluetooth V4.0, range ≤ 50m

Data format

RTCM2x, RTCM3x, CMR & CMR+, sCMRx
Dat, RINEX, NMEA outputs

storage

8GB internal memory, supports cyclic storage; with ability to collect over one year raw observation based on 5 seconds interval

Others

System integration

OS system:	Intelligent LINUX operating system
Tilt Compensation	IMU up to 60° (Calibration free)
Relay station	CORS relay, Radio relay
Supported controllers	All android devices with supported software
Design	
button	Power key
Indicator	Power indicator, data link indicator, satellite indicator, Bluetooth indicator
Voice	Intelligent voice prompts
WEBUI	Support WEBUI configuration

GUANGZHOU ALPHA GEO-INFO CO.,LTD
address: Room 601, Building No.1, Gaopu Road No.68, Tianhe District, Guangzhou 510630, Guangdong, China
www.alphageo-info.com
email: alphageo@aliyun.com
phone: +8618565149475

L300 Gnss


GNSS RTK RECEIVER WITH **CALIBRATION-FREE** TILT COMPENSATION

GNSS receiver

L300 is a compact new generation of smart GNSS receiver designed for any surveying project using the latest GNSS technology. This receiver is equipped with all modern required connectivity modules: Bluetooth, Internal radio, WIFI & 4G modem. 6800mAh Built-in battery, IMU tilt technology and WebUI are other latest technologies used in L600 receivers.

Multi constellation

L300 with its 965 channels new generation full GNSS chipset & ability to support multiple satellite constellation including GPS, GLONASS, BEIDOU, GALILEO, QZSS, SBAS and IRNSS provides precise and accurate spatial data for all users around the world.




WiFi and WebUI

L300 serves as a WIFI hotspot, so users can easily access, manage the status, set the configuration or download static and PPK raw data through advanced WebUI using computer, smartphone or other electronic devices with WIFI support without any need to third party software or cable.



IMU Tilt Sensor

L300 is equipped with a fast initialization, calibration free & immune to magnetic interference Inertial Measurement Unit (IMU). All users can use this technology to collect or stakeout topo points up to 60°.



GSM & UHF radio

A fast internet connection is guaranteed with a built-in 4G module that accelerate receiving correction data using all telecommunication signals and bands. L600 comes with an integrated Tx/Rx internal UHF radio that ranges from 410 MHz to 470 MHz with selectable frequency providing ability to connect and collect accurate real time data in Base/Rover mode.



Battery & Power

L600 is delivered with an internal large capacity 6800mAh lithium-ion internal battery supporting USB type-C fast charging which allows users to work for more than 9 hours in daily field work.



IP67

Choosing a small, light but professional, rugged GNSS receiver has always been a concern among professional surveyors. L600 with its high quality magnesium alloy body provides such advantages without decreasing quality or notable increase in price.




Working mode

Every surveyor needs to operators and choose suitable working method based on project requirements and required accuracy. In order to work in such condition users will need a device to be able to work in different modes such as Static, Network RTK, UHF RTK, PPK & etc. L600 is offering all you need in a package!



GNSS receiver

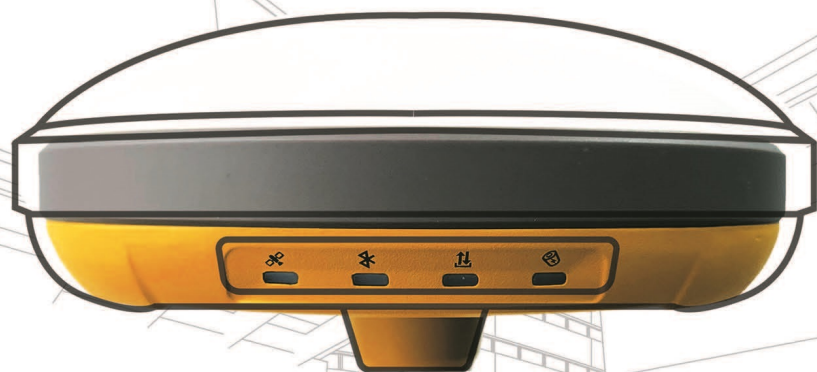

PRECISION
you can trust



IMU TILT



UHF RADIO



WEBUI



FULL GNSS

Performance specification

Satellite signals tracked simultaneously	GPS: L1 C/A, L2C, L2P, L5
	GLONASS: L1C/A, L1P, L2 C/A, L2P
	BEIDOU: B1, B2, B3, B1C, B2a, B2b
	GALILEO: E1, E5a, E5b
	QZSS: L1, L2C, L5
	SBAS: WAAS, EGNOS, MSAS, GAGAN, SDCM
	IRNSS: L5
Channels	965 tracking Channels
Cold start	<60 s
Hot start	<15 s
Positioning output rate	1Hz - 20Hz
Signal Reacquisition	<1s
RTK Initialization time	<10s
Initialization Reliability	>99.99%
Time accuracy	20 ns

Positioning¹

Code differential GNSS positioning	Horizontal: 0.25 m + 1 ppm RMS
	Vertical: 0.50 m + 1 ppm RMS
	SBAS differential positioning accuracy ² : typically <5m 3DRMS

Static GNSS surveying	Horizontal: 2.5 mm + 0.5 ppm RMS
	Vertical: 5 mm + 0.5 ppm RMS

Real Time Kinematic Surveying

Single Baseline < 30 KM	Horizontal: 8 mm + 1 ppm RMS
	Vertical: 15 mm + 1ppm RMS
Network RTK ³	Horizontal: 8 mm + 0.5 ppm RMS
	Vertical: 15 mm + 0.5 ppm RMS

HARDWARE

PHYSICAL	
Material	Magnesium alloy
Dimensions	160mm * 52mm (without bottom connector 74mm)
weight	≤1.0 Kg
Operating temperature	-40°C to + 75°C
Storage temperature	-55°C to + 85°C
Protection IP	IP67 dust proof, protected from 30min immersion to depth of 1m
Shock	Survive a 2m pole drop onto concrete
Vibration	MIL-STD-810G
Humidity	100%, condensing

1- Precision and reliability may be subject to anomalies due to multipath, obstructions, satellite geometry, and atmospheric conditions. The specifications stated recommend the use of stable mounts in an open sky view, EMI and multipath clean environment, optimal GNSS constellation configurations. Base lines longer than 30 km require precise ephemeris and occupations up to 24 hours may be required to achieve the high precision static specification.

2- Depends on SBAS system performance

3- Network RTK PPM values are referenced to the closest physical base station and depends on network performances.

ELECTRYCAL

Power: 9~24 V DC external power input on 5 pin LEMO port
Support USB Type-C fast charging
Internal 6800mA lithium-ion battery

Battery Life	Rover Mode: 12 hours
	Base Mode: 7 hours
	Static Mode: 15 hours

Communication & Data Storage

I/O interface	
LEMO port (5pin)	Supports power input, serial port control, and external radio communication
USB Type-C port	Data download / Charging
Sim card slot	Supports Nano-SIM
Antenna port	UHF antenna interface

Radio modem (optional)

Transmit power	1/2 w switchable, Work range is longer than 4km
Frequency band	410MHz-470MHz; supports to set the frequency

Supports retransmitting correction from CORS; compatible with other brands

Cellular

Integrated full frequency multi band 4G modem, supports WCDMA/CDMA2000/TDD-LTE/FDD-LTE

WIFI

802.11 b/g standard, access point & client mode, supports access to hotspot for correction transmission

Bluetooth

Fully integrated Bluetooth V4.0, range ≤ 50m

Data format

RTCM2x, RTCM3x, CMR & CMR+, sCMRx
Dat, RINEX, NMEA outputs

storage

8GB internal memory, supports cyclic storage; with ability to collect over one year raw observation based on 5 seconds interval

Others

System integration

OS system:	Intelligent LINUX operating system
Tilt Compensation	IMU up to 60° (Calibration free)
Relay station	CORS relay, Radio relay
Supported controllers	All android devices with supported software

Design

button	Power key
Indicator	Power indicator, data link indicator, satellite indicator, Bluetooth indicator
Voice	Intelligent voice prompts
WEBUI	Support WEBUI configuration

email:
phone:



ULTIMATE PERFORMANCE
OUTSTANDING INNOVATION

ONE SOLUTION

L600

GNSS receiver

L600 is a compact new generation of smart GNSS receiver designed for any surveying project using the latest GNSS technology. This receiver is equipped with all modern required connectivity modules: Bluetooth, Internal radio, WIFI & 4G modem. 6800mAh Built-in battery, IMU tilt technology and WebUI are other latest technologies used in L600 receivers.

Multi constellation

L600 with its 965 channels new generation full GNSS chipset & ability to support multiple satellite constellation including GPS, GLONASS, BEIDOU, GALILEO, QZSS, SBAS and IRNSS provides precise and accurate spatial data for all users around the world.




WiFi and WebUI

L600 serves as a WIFI hotspot, so users can easily access, manage the status, set the configuration or download static and PPK raw data through advanced WebUI using computer, smartphone or other electronic devices with WIFI support without any need to third party software or cable.



IMU Tilt Sensor

L600 is equipped with a fast initialization, calibration free & immune to magnetic interference Inertial Measurement Unit (IMU). All users can use this technology to collect or stakeout topo points up to 60°.



GSM & UHF radio

A fast internet connection is guaranteed with a built-in 4G module that accelerate receiving correction data using all telecommunication signals and bands. L600 comes with an integrated Tx/Rx internal UHF radio that ranges from 410 MHz to 470 MHz with selectable frequency providing ability to connect and collect accurate real time data in Base/Rover mode.



Battery & Power

L600 is delivered with an internal large capacity 6800mAh lithium-ion internal battery supporting USB type-C fast charging which allows users to work for more than 9 hours in daily field work.



IP67

Choosing a small, light but professional, rugged GNSS receiver has always been a concern among professional surveyors. L600 with its high quality magnesium alloy body provides such advantages without decreasing quality or notable increase in price.



Working mode

Every surveyor needs to operators and choose suitable working method based on project requirements and required accuracy. In order to work in such condition users will need a device to be able to work in different modes such as Static, Network RTK, UHF RTK, PPK & etc. L600 is offering all you need in a package!

